


Type Automatic Gate Opener



นวัตกรรมล่าสุด
ควบคุมประตูทางไกล

Mobile Remote

ทะลุขีดจำกัดการควบคุม ไม่ว่าจะคุณอยู่ที่ไหน ไกลแค่ไหน
ก็สั่งการทำงานของประตูได้...ผ่านโทรศัพท์มือถือของคุณ

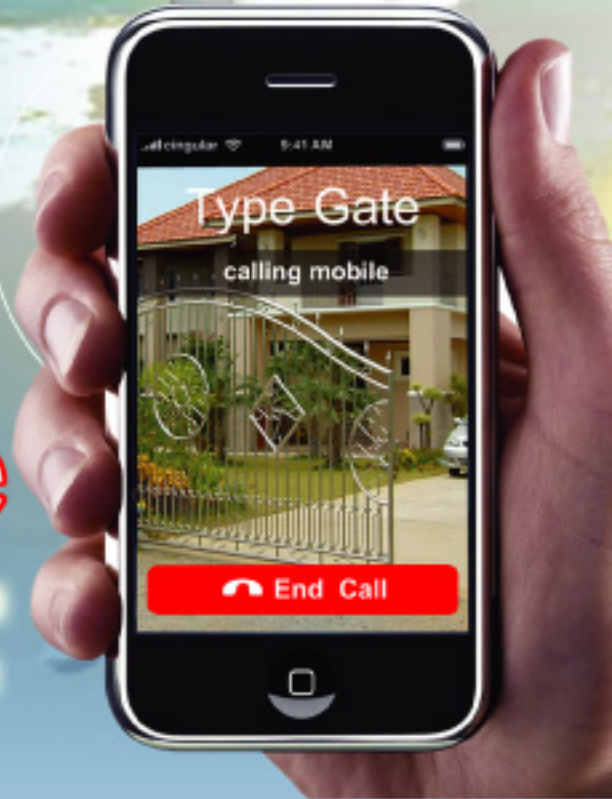








***ใช้ได้กับมือถือทุกรุ่น
เปิด-ปิด Free ไม่เสียเงิน

www.type.co.th



SIMple Life with T:Symple Remote



-  เปิด-ปิด FREE! ตลอด 24 ชม. ไม่เสียเงิน
-  ใช้งานได้กับ มือถือทุกรุ่น-ทุกเครือข่าย
-  ระยะรับรีโมท "ไกลสุด - ทั่วประเทศไทย"
-  ล็อค 2 ชั้น ปุ่มงัดประตูเปิดเอง 100%
-  มั่นทน เฟอร์นิเจอร์รีโมท มากสุด 250* เบอร์
-  ปลอดภัยด้วย การป้องกันการ COPY รหัส บนโทรศัพท์
-  ตรวจสอบรู้สถานะ: ประตุ "เปิด-ปิด" โดย ไม่ต้องเห็นประตู
ผ่านทาง SMS บนมือถือ

| Specification | |
|-----------------------|----------------------------|
| Power Supply | 12 VDC |
| Current | 300 mA. |
| Bands | Tri Band 900/1800/1900 MHz |
| Dimension WxLxH mm. | 39x90x5 |
| SIM Service Provider: | AIS, DTAC |
| Max Numbers Memory | 250* Numbers |
| SMS Command | Status,Lock,Unlock,Balance |
| Working Temperture | 0-75 °C |
| Interface | IDC 10 PIN |



Dealer:



Tanyapol Engineering Co.,Ltd.

58/93-94 Mu 8 Chimplee Talingchan Bangkok 10170








Tel: 0-2884-2401-2, 0-2884-4066

www.type.co.th www.tanyapol.com



SIMple Life with T:Symple Remote



-  **Open-Close FREE! 24 Hr. NO PAY**
-  **Work with all Mobile - all Network provider**
-  **Active Range - "All over Thailand"**
-  **Double Lock System - prevent gate from open by mistaken 100%**
-  **Memory Number of Remote Control Max up to 250* Numbers**
-  **Anti - COPY Code, completely safe**
-  **Check Gate Status, Lock, Unlock by sending SMS on Mobile**

| Specification | |
|-----------------------|----------------------------|
| Power Supply | 12 VDC |
| Current | 300 mA. |
| Bands | Tri Band 900/1800/1900 MHz |
| Dimension WxLxH mm. | 39x90x5 |
| SIM Service Provider: | AIS, DTAC |
| Max Numbers Memory | 250* Numbers |
| SMS Command | Status,Lock,Unlock,Balance |
| Working Temperature | 0-75 'C |
| Interface | IDC 10 PIN |



Dealer:




Tanyapol Engineering Co.,Ltd.

58/93-94 Mu 8 Chimplee Talingchan Bangkok 10170


Tel: 0-2884-2401-2, 0-2884-4066

www.type.co.th www.tanyapol.com

Comfortable
Durable Elegant Simple life
Ease of use

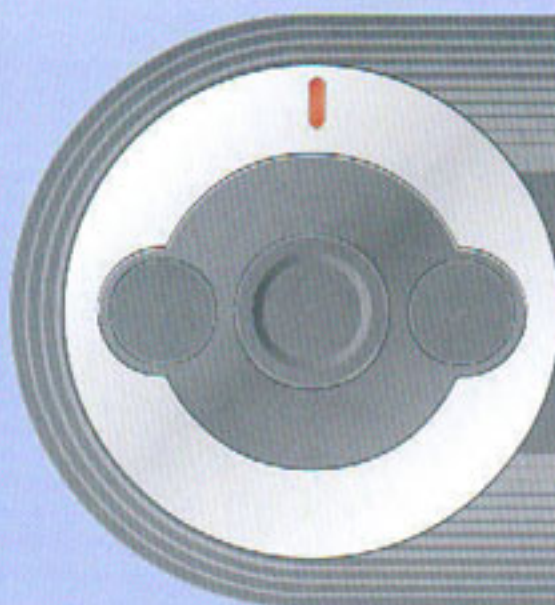

Sliding Auto Gate

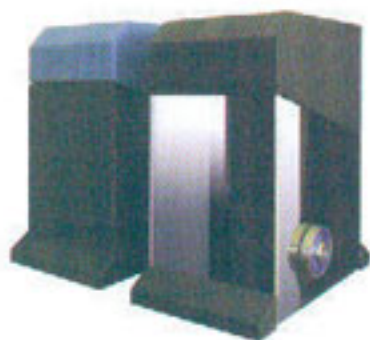

Type **Type**
Automatic Gate Opener

"Setting new standards for the next generation of home"

Switch control panel

NEW



Engineering elegance

Reliable protection

Beautiful design solution

High performance construction

Sliding Gate Opener

428



Sliding Gate Opener

LYNEX



automation"



Flashing Lamp with built-In Siren

NEW
Infra-Red
Photo Cell



NEW



Remote transmitter



Max. Gate 800 kg.

Irreversible electric brass gear motor, for diverse climatic conditions domestic gates 800 Kg., with optional outer case material of Stainless Steel & Steel Plated.



Slow Down 3 speeds

Reduce operator's speed with 3 steps at opening and closing.



DLS-Double Lock Security System

Enhance security gate from manual release and prevent gate opening from short circuit or unintentional pressing transmitter.



5 Minute Warning

Warning noise while user forget or left the gate open unattended longer than 5 minutes



Flashing Lamp & Siren

Blinking Lamp and Antenna with built-in Siren and Buzzer



Cover Board Box

Prevent control board from water or bugs.



Proximity Limit

Inductive proximity limit range of 5mm & 10mm.



Infra-Red Photo Cell



Reverse Jam Protecting System (JPS)

Reverse gate once the gate hit any object.



Auto Close 1 - 180 Sec



Thermal Protection 135 °c



Emergency Panic Siren

Emergency activate Siren within 5 Sec. via remote transmitter.



Frequency 433.92 MHz

3 Buttons transmitter wide range 30 200m. with power save button.



Easy Manual Release



Description**Technical Data**

| | LYNEX | 428 |
|---------------------------|---|------------------------|
| Supply | 220 VAC +/- 10% | |
| Power | 370 W | |
| Current | 1.7 A | |
| Max. Torque | 87.5 Nm | |
| Thermal Protection | 135 °C | |
| Lubricant | Molibdinum Disulfide Grease | |
| RPM | 1450 | |
| Linear Speed | 10.5 m./min. | |
| Max. Load | 800 kg. (Normal) / 1,000 kg. (Overload) | |
| Operator Weight | 14 kg. | |
| Dimension | L270 x W190 x H300 mm. | |
| Inductive Proximity Limit | 10 mm. | 5 mm. |
| Outer Case Material | Stainless Steel | Iron with Steel Plated |



Dealer

**TANYAPOL ENGINEERING Co.,Ltd.**

58/93-94 Mui 8, Talingchan-Supan Rd.

Chimblee, Talingchan, Bangkok 10170 THAILAND

Tel: (662)-884-2401, (662)-884-2402 Fax: (662)-884-2400

www.type.co.th / www.tanyapol.com / E-Mail: info@tanyapol.com